

SECS/HSMS communication simulator
(tdISSim)

(Trust Design Simple SECS/HSMS Simulator)

Instruction Manual

Version 12.121 : 2012.12.12
Version 14.040 : 2014.04.25
Version 15.041 : 2015.04.25
Version 15.050 : 2015.05.08
Version 15.080 : 2015.08.01
Version 15.110 : 2015.11.13
Version 15.111 : 2015.11.27
Version 16.011 : 2016.01.15
Version 16.012 : 2016.02.25
Version 16.040 : 2016.04.05
Version 16.060 : 2016.06.10
Version 17.030 : 2017.03.01
Version 18.011 : 2018.01.13
Version 18.020 : 2018.02.10
Version 18.032 : 2018.03.28
Version 18.041 : 2018.04.23
Version 18.070 : 2018.09.25
Version 19.020 : 2019.02.01
Version 19.070 : 2019.07.05
Version 19.100 : 2019.10.25
Version 20.040 : 2020.04.17

Trust Design Limited Liability Company

Chino City Nagano Prefecture Japan

E-mail: info@trust-design.co.jp
URL: <http://www.trust-design.co.jp>

T a b l e o f C o n t e n t s

| | |
|--|----|
| 1. Introduction | 1 |
| 2. Operation explanation | 3 |
| 3. Script language specification | 14 |

1. Introduction

This program simulates communication conforming to SEMI standard 1 message transfer (SEMI E4/SECS-1), high-speed SECS message service single session mode (SEMI E37.1/HSMS-SS) and high-speed SECS message service general session (SEMI E37.2/HSMS-GS).

This program has the following features.

- + Supports host side, device side, master side, slave side, passive side and active side.
- + It has message sending function, receiving function, and reply function to received message.
- + The reply can be made by automatically selecting appropriate reply message that matches the received message and replying automatically, or user can select and reply from multiple messages to be replied to.
- + It is possible to automatically operate continuous SECS message communication using script files written in own simple language.
- + SECS Communication trace can be saved in specified number and capacity of specified file.

- + Send and receive specified messages using message definition files in SML format.
- + It is possible to change and set data value of send message item according to send situation. In addition, it is possible to obtain a data value from file contents by preparing a file storing a large amount of data values and specifying file name as the data value of send message item.
- + You can use variable-length fields and items.

- + It is possible to define multi-level, multi-number indefinite number list. It is possible to fix number of lists at runtime and set each item value in the list.

- + The program can automatically operate continuous SECS message communication using its own simple language. This simple language has following mechanism.
 - Multiple scenario (execution sequence) definition
 - Variable (string, integer, real number)
 - Variable operation (four arithmetic operations etc.)
 - Condition judgment by IF statement
 - Processing branch by block IF statement, GOTO statement
 - Iteration by WHILE statement
 - Function call by CALL statement
 - Invoke external program by EXEC statement
 - SECS message sending and receiving
 - Change data item values that make up send message when sending
 - Extract data item value from received message and set as variable
 - Other ...
- + This simple language can be used as a simulation operation for normal SECS communication, but it is unfortunately not good enough in terms of scripting method, operation speed, etc.

- + In this program, there are parts that have been removed regarding error processing, processing speed, help function, simple language specifications, operation instructions, etc., but ... please forgive me.
- + Also, for same reason, it is assumed that well-meaning users who use them with correct settings and correct usage are intended for use. There is a part that does not correspond to some useless ways, etc., but please forgive.

- + For development of communication system by SECS/HSMS, our SECS/HSMS communication package (Trust Design Simple SECS Communication Library) is available.
For more information, please visit our home page.
- + You can use SECS/HSMS protocol converter program (Trust Design Simple SECS/HSMS Protocol converter) is released.
For more information, please visit our home page.
- + For monitoring communications by SECS (HSMS), our network communications monitor (Trust Design Simple) Network Communication Monitor) is available.
For more information, please visit our home page.
- + For monitoring communications by SECS-1 protocol using RS232C Serial Port, our serial communication monitor (Trust Design Simple Serial Port Communication Monitor) is available.
For more information, please visit our home page.

(Note) -----+
| This package uses following ports of UDP/IP for license management. |
| Also use following class D address as UDP/Multicast address. Please set not to block these |
| by firewall etc. of your computer. |
| - 36275/udp |
| - 239.254.200.75 |
| However, even if you can not connect to Internet connection environment, you can use it, and |
| there are no functional restrictions on usage as compared with same environment. |
+-----+

2. Operation explanation

(0) Preparation

Before starting this program, be sure to set up and prepare following two files correctly.

- + SECS/HSMS Communication parameter setting file (.ini file)
- + SECS/HSMS Communication message structure definition file (.sml file)

In addition, when performing automatic operation of communication, it is necessary to create in advance the following files that describe communication sequence with correct settings.

- + Scenario execution sequence definition script file (.ssl file)

The setting method of each file of .ini and .sml is in "Programmer's Manual (TDSE. pdf)" attached to our "SECS/HSMS communication package (Trust Design Simple SECS Communication Library) (TDS)". Please refer to the applicable part (.ini: 2.1(1), .sml: A(1)). "SECS/HSMS communication package" can be downloaded from our home page (<http://www.trust-design.co.jp/>).

Refer to Chapter 3 for the description of .ssl file.

In addition, the sample file of .ini, .sml and .ssl is attached to this package. First of all, it is recommended to use this sample file and revise it as needed.

(Note 1) When setting the SECS/HSMS communication parameter setting file (.ini), pay particular attention to following items. (For details, please refer to the above TDSE.pdf 2.1(1).)

- + SECSMODE : SECS communication parameter
 - bit#0,1 Communication type (SECS-1 or HSMS-SS)
 - 4 Equipment or Host
 - 5 SECS-1 : Master or Slave
 - 6 HSMS : Active or Passive
- + DEVMODE : Device control mode
 - bit#0 Device ID check
 - 1 Processing when receiving secondary message that is not in receiving wait state
 - 8-12 ... S9Fx, Reject Automatic transmission
- + XDEV : Maximum number of connected devices
- + DEVID : Connected device ID
- + XMSGSIZE : Maximum SECS message byte length
 - Specify a numerical value with some margin.
- + SDEVICE : COM port name used when connecting to SECS-1 ("COM1" etc.)
- + HOST : Connection destination host name or IP address for Active connection at HSMS-SS connection.
- + PORT : TCP/IP port number used for HSMS-SS connection
- + LINKINT : Link test execution interval when connecting HSMS-SS
 - When performing link test, specify number of seconds for the execution interval.
- + TRCDIR : Communication trace file storage folder
 - When specifying relative path, folder where .ini file exists is base point.
 - Refer to TDSE.pdf 2.1(3) for file name of communication trace file.
- + TRCTTYPE : Format of communication message output to communication trace
 - Refer to TDSE.pdf 2.1(1) (c)
- + TRCTOUT : Communication trace output mode
- + TRCTLEVEL : Communication trace output level
 - When outputting communication control code in SECS-1, specify a value of 6 or more. When outputting trace related to link test in HSMS-SS, specify a value of 9 or 10 or more.

<< Continue to next page >>

<< Continue from previous page >>

- + MDMSSG : Specify a message definition file (.sml) to be used for communication trace output.
- + MDMXITEM : Maximum number of total data items
- + MDMXMSSG : Maximum number of messages to define
- + MDMXITEM : Maximum number of total data items + maximum number of items when expanding messages
- + MDMXPOOL : Message definition Setting data storage area size

For these items, specify numerical values with some margin.

(Note 2) If opposite side SECS message transmission frequency is high (message transmission at high speed continues, etc.), please note the setting of following items in order to improve response speed of tdISSimE.

- + INTERO Communication control unit processing interval
(For details, please refer to [Information] of TDSE.pdf 2.1(2) (c))
- + TRCTTYPE Communication message output format to communication trace
(For details, please refer to (Note) of TDS.pdf 2.1(2) (c) TRCTTYPE)
When communication trace output is performed in List format, if it is set to analyze SECS-2 message using message definition file and display message name, item name, etc., many resources are required for the process. Even if list format output is necessary, display output of message name and item name is not necessarily required, set so that it is not displayed.
- + TRCPOUT, TRCUOUT ... tdISSimE outputs processing trace and user I/F function trace in addition to communication trace. Since these trace outputs will also be a load, please do not set these outputs (TRCPOUT=0, TRCUOUT=0).
- + TRCTHOST, TRCTPORT . If external monitoring of communication trace is not required, the processing load on external communication trace output requires a corresponding processing load, so set this function not to be used (TRCTHOST="", TRCTPORT=0).

(Note 3) In the cases shown in (Note 2) (when the frequency of sending SECS message of communication partner is high), the response speed of tdISSimE can be improved by following measures.

- + By unchecking [Display]-[List format display] in screen settings, you can stop LIST format display of SECS message on screen. If you need to display the details of SECS message, please select display in [Hexa decimal format display].
(Of course [Hexadecimal format display] is also expensive, so if you don't do [Hexadecimal format display], the load on tdISSimE will be reduced.)
- + When executing scenario script and performing response processing with scenario script, if it is possible to substitute the automatic reply function that tdISSimE has for reply processing, using automatic reply function instead of scenario script has less load and response speed is improved. If the use of a scenario script is indispensable, if it is acceptable to use an automatic response instead of processing in scenario script for received message, the response can be made by using an automatic response without specifying that message in the RESERVE statement. It can improve the speed.


(1) Start-up

Start tdlSSimE.exe (or a shortcut to tdlSSimE.exe) in the installed folder by double-clicking etc.

This program uses "MS Gothic" as the font used.

Please execute in the environment where the font can be used.

(2) Screen operation explanation

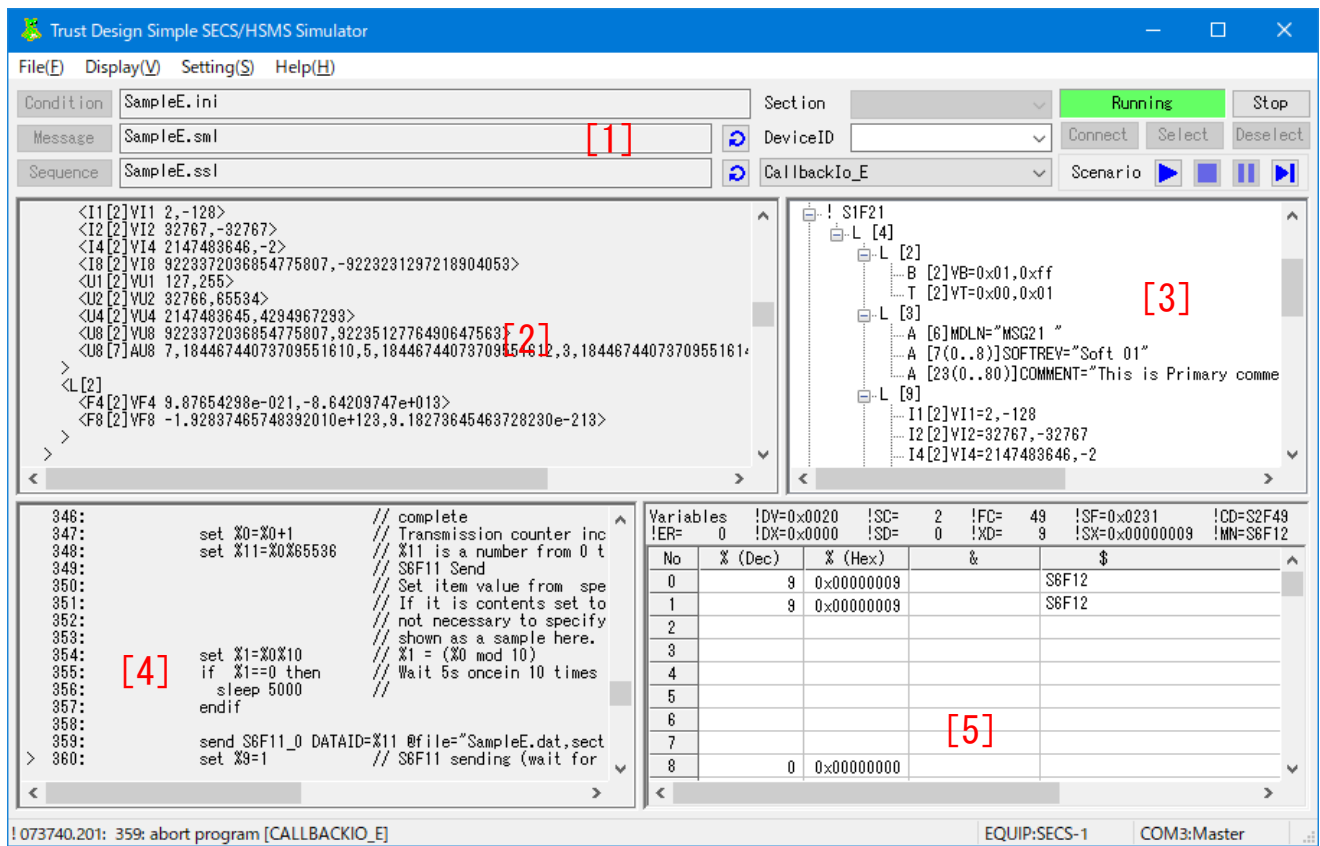

[1] : Overall control panel

Setting of operating conditions.

Start and stop simulation. Perform operations such as communication scenario execution.

[2] : Communication trace display

Displays trace of SECS communication messages sent and received.

[3] : Communication message editing

Edit SECS communication message to be send/receive, which is determined by specified "Message definition file", and edit message items that make up send message.

[4] : Auto run script

The contents of specified "Sequence definition file" are displayed, the script corresponding to selected scenario is confirmed, and when the scenario is automatically executed, execution statement is shown.

[5] : Script variable

Displays contents (values) of "Script variable" used by automatic execution script. Also, specify (change) the value.

[Note] The display language used in dialogs such as "File selection dialog" depends on your Windows environment. For example, when tdlSSimE.exe is started in Japanese environment Windows, display language of "File selection dialog" will be Japanese.

< Reference > General operation procedure

1. Select .ini file that describes SECS/HSMS communication parameters with [Condition] button.
2. When automatically executing a scenario, use [Sequence] button to select .ssl file containing scenario execution sequence definition script.
3. In the [Display] menu, specify the display format for communication trace window [2].
4. In the [Setting] menu, select "Equipment" or "Host".
5. Start the simulation process with [Start] button.
6. Processing when "Auto Connect" is not specified in [Settings] menu of HSMS active connection.
For HSMS-SS, press [Connect] and [Select] buttons in order to establish communication with the passive side.
For HSMS-GS, after connecting to passive side with [Connect], select the DeviceID to be selected, and with [Select] button, establish communication regarding target DeviceID.
7. After that, please enjoy your favorite operation.

(Note 1) If the following error occurs when pressing [Start] button, change the specified value of the corresponding part of specified .ini.

| | |
|---|-----------|
| -941 : Insufficient space in data item definition table | MDMXITEM |
| -942 : Insufficient space in message definition table | MDMXMSSG |
| -943 : Insufficient space in table for storing items for each message | MDMXMITEM |
| -944 : Insufficient data storage area to set/check items per message | MDMXPOOL |

Other error numbers are same as "TDS". Please refer to corresponding section in "Programmer's Manual (TDSE.pdf)" attached to above-mentioned "SECS/HSMS Communication Package (TDS)".

- (Note 2) When this program operates in automatic response mode, basically all messages that may be received should be defined in message definition file (.sml). The following secondary messages can be sent back regarding reception of specified SF-Code, regardless of message structure.
- + Define default secondary messages in message definition file. For details, please refer to A. (1) (b) of TDSE.pdf described in (Note 1).
 - + Use scenario execution script. Refer to the notes in Chapter 3. (0) for details.

(a) Menu

(a-1) [File]

- + End of application .. Exit tdISimE.

(a-2) [Display]

- + Clear communication trace
Clear Communication trace display window [2].
- + View last line of communication trace
Set the scroll bar of Communication trace display Window[2] to the state where the last line is displayed. (Used when final line does not easily appear in normal scroll bar operation, etc., with auto scrolling at high speed, etc.)
- + List format display
Displays send/receive SECS message in specified List format in communication trace window.
- + Hexa format display
Displays send/receive SECS message in Hexadecimal format in communication trace window.
- + Script trace display
When executing a scenario automatically, displays the script statement currently executed.
- + Save windows position and size
When the program ends, information such as window position at end time, size, and specified conditions are saved. The next time you start up, the screen state will be restored base on that information. (The status is saved in tdISSimEWin.ini in same folder as tdISSimE.exe.)
- + Status bar display
Display status bar.

(a-3) [Setting]

- + Equipment
The simulation is performed on the "Equipment" side.
If [Section] is not specified in [Condition], [EQUIP] section of .ini file containing specified SECS/HSMS communication parameters is used.
- + Host
The simulation is performed on the "Host" side.
If [Section] is not specified in [Condition], [HOST] section of .ini file containing specified SECS/HSMS communication parameters is used.
- + Automatic connection
If the setting in .ini file that describes specified SECS/HSMS communication parameters is HSMS active connection, Connection to passive side and Select processing are automatically performed after the simulation is started.
(Note 1) Automatic connection is made in case of "Active connection" setting.
- + Automatic response
If checked, when primary message that requires reply is received from the other side, the optimal secondary message is automatically selected and sent according to settings in specified message definition file (.sml).
(Note 2) When multiple secondary messages with same SF-Code to be replied are set in .sml file, select the first secondary message after the primary message definition determined by parsing the received primary message. If there is no definition of target secondary message behind received primary message definition, search will return to beginning of definition file and search. If still can not find it, reply S9F3, S9F5 etc.
When unchecked, when receiving primary message that requires reply from the other side, dialog box for selecting reply message is displayed, and message to be sent is selected.
- + Message directon evaluation
The validity of the message for each "Equipment" and "Host" specified in message definition file (.sml) is judged, and only the valid transmission target messages can be selected for transmission. When unchecked, it is possible to select all messages as transmission targets regardless of the current operating status, "Equipment" or "Host".


+ Communication test mode

If checked, it will be in the mode to do a simple communication test.

In this mode, you can specify the following.

- Specification of each item value of SECS header part of transmission data
- Byte length of SECS message part of transmission data
- In the case of HSMS connection, specify the byte length of sending TCP/IP packet and divide sending

In this mode, when send message is selected, following dialog will be displayed, and the above parameters can be specified.

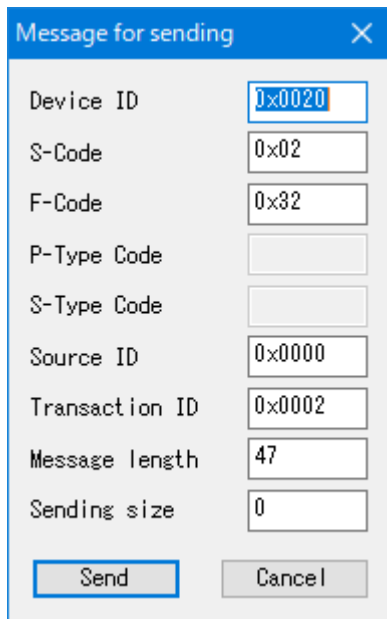

| Field | Value |
|----------------|--------|
| Device ID | 0x0020 |
| S-Code | 0x02 |
| F-Code | 0x32 |
| P-Type Code | |
| S-Type Code | |
| Source ID | 0x0000 |
| Transaction ID | 0x0002 |
| Message length | 47 |
| Sending size | 0 |

The header value of SECS message to be sent next will be displayed by default, so correct the values as necessary. When entering hexadecimal number, add "0x" as a prefix.

Message length

Specifies byte length of SECS message part of send message.

Sending size

When connecting HSMS, specify 1 or more numeric value when transmitting divided transmission packets. If it is 0, SECS message part will be sent at once.

When connecting SECS-1, specify transmission byte length (1 to 254) at the time of multi block transmission. If it is 0, it will be 254 bytes.

(Note 3) This mode can be specified only when script execution is not performed and automatic response is disabled.

(Note 4) P-Type and S-Type Code can be specified only when the communication mode is HSMS. The block number can not be specified when connecting SECS-1.

(Note 5) If you change the value of each item in SECS header and send it, the other side's operation can not be predicted.

In tdISSimE, it processes "it is appropriate." (It does not necessarily mean normal operation.)

(b) Overall control panel

+ [Condition]

Select .ini file that describes SECS/HSMS communication parameters. Direct input is also possible.

+ [Message]

Select SECS message definition file (.sml) that this program uses for display operation on the window. Direct input is also possible. When specifying relative path, it will be based on the folder where .ini file exists.

If this item is not specified, the file specified in MDMSSG of SECS/HSMS communication parameter setting file (.ini) is used as message definition file.

(Note 1) When displaying message name and item name of analyzed message structure in communication trace file which is output by specification (TRCTOUT, TRCTTYPE etc. of .ini), it is the file specified in MDMSSG of .ini.



+ Reloads the specified SECS message definition file (.sml) again.

Use if you change the .sml file after simulation process started.

(Note 2) In this process, reloading is performed on the window display and message definition related to operations. The message structure, message names, item names, etc. output to communication trace file are message definition files specified in MDMSSG of .ini. If this file is changed during simulation, it will be reflected in communication trace output after a while.

+ [Sequence]

Select the file (.ssl) containing auto-execution script to be used to execute the SECS communication scenario automatically. Direct input is also possible. When specifying relative path, it will be based on the folder where .ini file exists. If you do not want to automatically execute communication scenario, you do not have to specify it.



+ Reloads the specified auto-execution script file (.ssl) again.

Use if you changed the .ssl file after simulation process started.

+ Section

Select the section name to be used in specified .ini file.

If this item is not specified, [EQUIP] is used when operating as "Equipment", and [HOST] is used as section name when operating as "Host".

+ DeviceID

Select or specify DeviceID (SessionID) to be assigned to primary message to be sent.

(If you specify in hexadecimal, add "0x" as a prefix. The drop-down list shows a list of up to 64 DeviceIDs defined in DEVID of the specified .ini file.

DeviceID (SessionID) already in Select state at the time of display is marked with "*".

If this item is blank, the first value defined in DEVID of .ini file is used.

When using HSMS-GS, this field value is also used when sending Select, Deselect, and Separate requests.

+ Scenario selection

Select a scenario to execute automatically.


Select from the list of program names specified in the program statement of specified automatic execution script file (.ssl).


- + [Start] / [Stop]
 - Start : Start simulation processing.
 - Stop : Stop simulation processing


- + [Connect] / [Separate]
 - Connect : When not connected automatically when connecting HSMS, connect to Passive side.
 - Separate : Send "Separate request" to opposite side.
 - When running HSMS-SS, it will disconnect as it is.
 - When running HSMS-GS, the operation differs depending on setting of .ini file.
 - For details, refer to description of SECSMODE in TDSE.pdf 2.1 (1)(c) described in 2. (0).


- + [Select]
 - Select : If HSMS connection is not automatic connection, send "Select request" to Passive side.
 - When running HSMS-GS, send "Select request" by specified DeviceID (SessionID) to Passive side.

- + [Deselect]
 - Deselect : Send "Deselect request" to opposite side.
 - When running HSMS-GS, send "Deselect request" by specified DeviceID (SessionID) to Passive side.
 - (Note 3) In HSMS-SS, Deselect is not usually used.

- +  Start execution of auto-execution script of selected scenario.

- +  Stop execution of currently running auto-execution script.

- +  Pauses execution of currently running auto-execution script.

- +  Executes one line of currently running auto-execution script and pauses.

(c) Communication trace display

It displays the trace of sent and received SECS communication messages, and also displays the execution statement of automatic execution script as specified ([Script trace display] in the [Display] menu).

(Note 1) The form of list format display of SECS communication messages is determined by following parameters of the .ini file.

+ TRCTTYPE ... Communication message output format to communication trace
 bit#2 Item data display format
 =0: Display each item on one line only and omit the back if it does not fit on one line.
 1: Each item is displayed on multiple lines, 20 items for numerical items and 100 bytes for character string items.
 bit#4,5,6 .. List output format (Normally set to 2)
 =0: TDS Format
 2: SML Format
 bit#7 Data item name display (Normally set to 1)
 bit#8,9 Message definition file format
 (Normally set to 0 and prepare the message definition file in SML format)
 =0: SML Format

(Note 2) The form of hexadecimal display of SECS communication messages is determined by following parameters of .ini file.

+ TRCTTYPE ... Communication message output format to communication trace
 bit#3 Hexadecimal display format
 =0: Display 16 Bytes on one line.
 1: Display 20 Bytes on one line.

(Note 3) The communication driver (TDS.dll) automatically issues S9F9 according to the setting ((DEVMODE&0x0100)!=0) of .ini when there is no receiving of secondary message for sending primary message and T3 timeout occurs. The SECS messages automatically issued by the communication driver are also displayed in communication trace display window.

(Note 4) For example, when a corresponding secondary message is received from opposite side after a T3 timeout occurs. If the setting of .ini does not receive an invalid secondary message ((DEVMODE&0x0002)==0), an invalid secondary message is not displayed in the communication trace display window at the time of received.

To also display these messages in communication trace display window, set the DEVMODE setting in .ini to ((DEVMODE&0x0002)!=0).

However, regardless of DEVMODE setting, all SECS communication messages are output to communication trace file.

(Note 5) The LinkTest message at the time of HSMS connection is not displayed on communication trace display window. Output to communication trace file in case of TRCTLEVEL>=9.

(Note 6) Communication control code when sending/receiving by SECS-1 connection is not displayed in communication trace display window. Output to communication trace file in case of TRCTLEVEL>=6.

(Note 7) The output to communication trace file depends on .ini TRCDIR, TRCTTYPE, TRCTOUT, TRCTLEVEL, and TRCTSIZE. Please refer to TDSE.pdf 2.1 (1) for details.

(d) Communication message editing

Display the contents of the specified message definition file.

The message to be sent on your side is displayed with the '!' Character at the beginning of message name.

Therefore, when [Message direction evaluation] is checked in the [Settings] menu, only messages with '!' Can be sent to opposite side. If not checked, all messages can be sent.

- + When you double-click on a message name, it will be sent to oppsite side with the contents of the items that make up currently set message.
- + The following menu can be executed by right-clicking on the message name.
 - [Send] : Same as double-clicking on a message name.
 - [Initialize] : Returns each item that composes a message to definition in message definition file.
- + You can change the data item values by opening message name and viewing the data items that make up the message. If you execute [Edit] of the menu displayed by double-clicking item name or right-clicking, "Edit SECS Message" dialog will appear, and edit the data item values.
 - For the variable quantity list item, enter "No. of Item".
 - Enter multiple numeric items separated by ','. When specifying a hexadecimal number for a numeric item, add 0x as a prefix. (Example: 12,0x3a, 4321,0xff)
 - For items configured with multiple items, both item value input and setting "No. of Item" input can be performed, and the number specified later will be valid.

(Note 1) If the message has a variable count list, you must first determine the number of variable count lists. When a plurality of variable number lists are provided, the number of top level list is determined, and if the level is the same, the number of upper lists is determined, and the number of all variable number lists is determined. After that, set up other data items.

(Note 2) The message edited here is used to send message by double-clicking (or [Send]) message name, and to send message within an auto-execution sequence.

(Note 3) The send message constructed by send statement of automatic execution script is not reflected in this window.

(Note 4) [Start] initializes the message definition when simulation process is started. Even if you use the same message definition file as previous one, I will initialize with no regrets.

(e) Auto run script

After selecting an auto-execution scenario and starting execution of auto-execution sequence, the current execution status is displayed.

It is shown by adding '>' at the beginning of the line to be executed next.

(f) Script variable

Displays the values of script variables and special variables used in automatic execution sequence. Script variables can change their values. For details on script variables and special variables, refer to Chapter 3 (5).

%(Dec) and %(Hex) is same integer script variable.

& is a real script variable.

\$ is a string script variable.

You can change the value of corresponding script variable by clicking "cell" of each script variable and directly keying in the value.

(Note 1) Special variables and script variables are initialized at start of execution of automatic execution scenario.

3. Script language specification

Describes how to write scenario execution script file for automatic execution of communication processing in this program.

(0) Overall structure

Multiple execution units can be described in one scenario execution script file (.ssl file). During automatic execution, only one of the execution units described in selected script file is selected to operate. The operation can operate the written statement continuously or one step at a time.

- + One execution unit starts with "program" statement and ends with "end" statement.
- + If there is "/" notation in the line, it will be treated as a comment after that.
- + If the end of the line is "¥", it is treated as continuing to the next line. However, the length of the entire line including continuation line is up to 2000 bytes.

(Note 1) If "/" exists before the continuation symbol, the comment is ignored and continued on the next line.

For example ... the next 2 lines

```
%1=123    // This is a comment ¥
```

```
%2=456
```

will be "%1=123 %2=456".

(Note 2) This program assumes that "good-meaning users" use them "right". Even if there is an incorrect description of the grammar etc., it will process as it is, without making an error report etc. in particular.

(Note 3) By setting a value to the special variable !TS, it is possible to delay the execution speed of each line of script, and it is possible to make the process contents confirmation of the script (slightly) easier. Please refer to (5) "set" for details.

(Note 4) When this program operates in automatic response mode, basically all messages that may be received should be defined in the message definition file (.sml). However, for the reception of specified SF-Code, the following secondary message can be sent regardless of message structure by following method.

- + Define default secondary messages in message definition file.

For details, please refer to A. (1)(b) of TDSE.pdf described in Chapter 2 (0).

- + Use scenario execution script.

The scenario execution script can reply to the specified secondary message regarding reception of the specified SF-Code, regardless of the message structure. The receiving process of scenario execution script is not performed for defined message structure, but is performed for the specified SF-Code. Please refer to AnyS5F1_S6F11 of attached sample script (SampleE.sml) for actual script writing method etc.

This script consists of the following statements.

- (1) program (prog) Declare the start of the run unit
- (2) function (func) Declare the start of a function (subroutine)
- (3) end Declare end of execution unit and function
- (4) exit Execution end
- (5) set {Optional} Assignment to script variable, operation
- (6) if Conditional branching
- (7) while Repeat control
- (8) break Exit from the current while block
- (9) continue Move to the end endwhile of the current while block
- (10) goto Move processing to specified label line
- (11) call Execute specified function
- (12) return End the execution of the function and return to the calling position
- (13) exec Execution of external program
- (14) reserve (resv) Waiting for receiving SF-Code specified for processing by script
- (15) cancel Cancellation of waiting for reception SF-Code
- (16) wait Waiting to receive the SF-Code message specified in "reserve"
- (17) release (rels) Release received SECS message area
- (18) receive (recv) Parsing received SECS messages
- (19) send Send specified SECS Message
- (20) sleep Sleep for specified time
- (21) display (disp) Output script variable to communication trace
- (22) print Output specified string to communication trace
- (23) pause Move to STEP mode (execute one line at a time)

(1) program (prog) Declare the start of the run unit

```
program XXXXX    or    prog XXXXXX
~~~~~
```

XXXXXX : Program name

From here, the scenario execution sequence of this name begins.

When a program name of sequence to be executed is specified at the time of script execution, a sequence of program names matching the name is executed.

The end of a series of program execution units must end with an end statement.

(2) function (func) Declare the start of a function (subroutine)

```
function XXXXX    or    func XXXXXX
~~~~~
```

XXXXXX : Function name

From here, the sequence of this function name begins.

A function is transferred from another by call statement, and the process moves to the next of the call statement by return statement or the last end statement in function.

The end of a series of function execution units must end with an end statement.

(3) end Declare end of execution unit and function

```
end
~~~
```

(4) exit Execution end

```
exit
~~~~
```

(5) set {Optional} Assignment to script variable, operation

[set] par=exp [par=exp [...]] (Note 1) The keyword "set" is optional
~~~~~

par=exp : Set values for script variables, script constants, and some special variables.

Script variables are as follows, and any variable can be specified in any item.

\$00 .. \$99 : String variable  
%00 .. %99 : Integer variable  
&00 .. &99 : Real variable

The notation such as %[0] or \$[%2] is also possible. %[0] is the same as %00, and \$[%2] is the index value of the \$variable as the %2 value at the time of evaluation.

(Note) Only %variables can be specified in [].

The following can be specified as script constants. For script constants, only simple assignment is possible (operation assignment is not possible).

!TS : Execution delay time (mili seconds) of each script execution line.  
Specifying a value >0 during debugging etc. makes script execution speed slower and makes it easier to follow the operation.

!TW : Timeout time for script to receive and issue 'Release' statement after receiving SECS message. Specify in mili seconds, but resolution is in seconds. The assignment to !TW becomes effective from next SECS message receiving.

The following special variables can be specified for 'par'. Special variables can only be assigned by simple assignment (operation assignment is not possible).

!DX : Device ID to be assigned to next transmission primary message

The following can be specified as 'exp'.

Constant : "String", Number

You can embed script variables in "strings" that you assign to string variables (\$xx). When describing script variables and special variables themselves (eg \$09, !ER), put the same character before script variables etc. and escape. (For example, describe as \$\$09, !!ER.) Also, if you include in "string ", escape it with ¥.  
(For example, if you write \$1="¥"ABC¥" - ¥"XYZ¥", \$1 becomes "ABC" - "XYZ")  
Hexadecimal numbers are specified in 0xff format.

Variable : \$9, %9, &9

<< Continue to next page >>

<< Continue from previous page >>

Special variable :

|                                                                         |                                   |
|-------------------------------------------------------------------------|-----------------------------------|
| !TM : Current time                                                      | (Total seconds)                   |
| !YY : Current years lower two digits                                    | (YY : 0 - 99)                     |
| !MD : Current month                                                     | (MM : 1 - 12)                     |
| !DD : Current date                                                      | (DD : 1 - 31)                     |
| !HH : Current hour                                                      | (HH : 0 - 23)                     |
| !MM : Current minute                                                    | (MM : 0 - 59)                     |
| !SS : Current second                                                    | (SS : 0 - 59)                     |
| !T3 : T3 Timeout value                                                  | (mili second)                     |
| !TS : Script execution delay time                                       | (mili second)                     |
| !TW : Script reception processing Timeout value                         | (mili second)                     |
| !ER : SECS send/receive execution error code                            |                                   |
| =0:OK 1:Receive error 2:Send error 3:Wait Timeout                       |                                   |
| !DX : Device ID to be assigned to the next transmission primary message |                                   |
| !DV : Final received Device ID                                          |                                   |
| !SC : Final received S-Code                                             | ( 8bit)                           |
| !FC : Final received F-Code                                             | ( 8bit)                           |
| !SF : Final received SF-Code                                            | (16bit S-Code + F-Code)           |
| !CD : Final received SF-Code                                            | (S99F99 Format string)            |
| !MN : Final received Message name                                       | (Name in message definition file) |
| !SD : Final received Source-ID                                          | (16bit)                           |
| !XD : Final received Transaction-ID                                     | (16bit)                           |
| !SX : Final received System-byte                                        | (32bit) (!SD*0x00010000+!XD)      |

Formula : Variable1 Operator Variable2

Variable1 and variable2 may be constant

Variable1 may be special (integer type) variable

Variable1 must be of the same type as 'par'

Operator is any of the following for each type of 'par'

String variable : +

Integer variable : +, -, \*, /, ^, %, &, |, <<, >>

Real variable : +, -, \*, /, ^

(Note 2) **You can not put blanks in par=exp, including before and after the operator.**

That is, %1=%2+3 is OK. But %1 = %2+3 is NG.

( 6) if ..... Conditional branching

```
if exp [then] statement          // 'then' can be omitted
~~~~~                          // (Note 1) In this case, you can not put elseif and else
 // next to construct a block if.
```

or

```
if exp0 then
 statement block if 'exp0' is true
elseif exp1 then // elseif block is optional
 statement block if 'exp1' is true
else // else block is optional
 Statement block when all if and elseif
 conditional expressions are false
endif
~~~~~
```

exp : Comparison operator or constant (true or false)

Expression1 Comparison-operator Expression2

The following can be specified as 'Expression1'

Variable : \$99, %99, &99

Special variable :

|                                                                         |                                   |
|-------------------------------------------------------------------------|-----------------------------------|
| !TM : Current time                                                      | (Total seconds)                   |
| !YY : Current years lower two digits                                    | (YY : 0 - 99)                     |
| !MD : Current month                                                     | (MM : 1 - 12)                     |
| !DD : Current date                                                      | (DD : 1 - 31)                     |
| !HH : Current hour                                                      | (HH : 0 - 23)                     |
| !MM : Current minute                                                    | (MM : 0 - 59)                     |
| !SS : Current second                                                    | (SS : 0 - 59)                     |
| !T3 : T3 Timeout value                                                  | (mili second)                     |
| !TS : Script execution delay time                                       | (mili second)                     |
| !TW : Script reception processing Timeout value                         | (mili second)                     |
| !ER : SECS send/receive execution error code                            |                                   |
| =0:OK 1:Receive error 2:Send error 3:Wait Timeout                       |                                   |
| !DX : Device ID to be assigned to the next transmission primary message |                                   |
| !DV : Final received Device ID                                          |                                   |
| !SC : Final received S-Code                                             | ( 8bit)                           |
| !FC : Final received F-Code                                             | ( 8bit)                           |
| !SF : Final received SF-Code                                            | (16bit S-Code + F-Code)           |
| !CD : Final received SF-Code                                            | (S99F99 Format string)            |
| !MN : Final received Message name                                       | (Name in message definition file) |
| !SD : Final received Source-ID                                          | (16bit)                           |
| !XD : Final received Transaction-ID                                     | (16bit)                           |
| !SX : Final received System-byte                                        | (32bit) (!SD*0x00010000+!XD)      |

<< Continue to next page >>

<< Continue from previous page >>

The following can be specified as 'Expretion2'

Constant : "String", Number (Hexadecimal is 0xff format)

Variable : \$99、%99、&99

The following can be specified for each form of 'Expression1' as a comparison operator

String : ==, !=, <, <=, >=, >

Integer : ==, !=, <, <=, >=, >

Real : ==, !=, <, <=, >=, >

(Note 1) **You can not put spaces in exp, including before and after the operator.**

That is, %1==%2 is OK. %1 == %2 is NG.

label : Label for jump to (Refer to 'goto')

statement : Executable statement

(Note 3) If you write a block 'if' statement, you can nest 'if' within a statement block.

(Note 4) There is no space between the 'else' and 'if' in the 'elseif' statement  
and between the 'end' and the 'if' in the 'endif' statement.

( 7) while ..... Repeat control

```
while exp do
  "A statement block that executes repeatedly while 'exp' is true"
endwhile
~~~~~
```

exp : Comparison formula (Refer to (6) 'if' statement)  
 Specifying "true" as 'exp' results in an infinite loop.

(Note 1) Nesting of while blocks can be configured up to 30 levels in the entire execution program (including in functions by call statements).

(Note 2) We do not assume that if -- endif blocks and while--endwhile blocks get worn. Even if the block configuration is wrong, no error indication occurs.

(Example) The following is an incorrect configuration. But do it as it is.

```
if true then
 %2=0
 while %2==0 then
 "Zzzzzz...."
 endif
endwhile
```

( 8) break ..... Exit from the current while block

```
break
~~~~~
```

( 9) continue ..... Move to the end endwhile of the current while block

```
continue
~~~~~
```

(10) goto ..... Move processing to specified label line

```
goto label
~~~~~
```

label : Jump destination label  
 The label is described as "XXXXX:".  
**Do not put an executable statement on the label line.**  
 Label lines must be within the currently executing processing unit (program -- end  
 or function -- end).

- (11) call ..... Execute specified function

```
call func_name
~~~~~
```

func\_name : Name of called function

- (12) return ..... End the execution of the function and return to the calling position

```
return
~~~~~
```

- (13) exec ..... Execution of external program

```
exec [+w] "program [parameters...]"
~~~~~
```

+w : When this option is specified, the specified program is started with window displayed. If not specified, the specified program has no window.

program : External program to launch (Path name of .exe)

parameters : Arguments to pass to 'program'. Like print statements, it can contain script variables and special variables.  
Also, if you add '&' at the end (before closing), processing will be continued without waiting for the specified program to finish.

(Note 1) Standard input/output redirection can not be used.

(Reference) The program started by 'exec' statement creates the contents of SECS message item according to run time argument and records the result in file such as "secs\_item.dat". In the subsequent 'send' statement, you can create SECS message to be sent as "send SxFx\_xx @file=secs\_item.dat,section" for specifying SECS message item. Refer to 'send' statement.



(14) reserve (resv) ..... Waiting for receiving SF-Code specified for processing by script

```
reserve SxFx [SxFx] ... or resv SxFx [SxFx] ...
~~~~~
```

SxFx : SF code for receiving reservation ((Note) Not a message name)  
Write S0F0 to wait for all messages.

(Description) Reserve receiving messages for script processing. The specified SF-Code is reserved in addition to other already reserved SF-Codes. If the specified SF-Code is already reserved, nothing will be done.

If receive an SF-Code that does not 'reserve' for receiving, in the case of a primary message, return a secondary message by automatic response, and in the case of a secondary message, receive it as it is.

When receiving an SF-Code that has been reserved for receiving, it is necessary to wait for message receiving using a 'wait' statement, and then analyze the received message using a 'receive' statement, and then be sure to release the received message area using a 'release' statement. When 'release' statement is executed, processing for received message is completed, and reserved SF-Code in 'reserve' statement is released. Therefore, when waiting for receiving with same SF-Code again, 'reserve' statement must be executed again.

(Note) For example, in the case of sequence of receive S1F13, send S1F14, receive S1F1, send S1F2, it shows the case where S1F1 sending on the opposite side is quick after sending of S1F14. If you are not ready to receive this S1F2, you may not be able to receive S1F2 in the script. Therefore, if the opposite side sending/receiving for my side sending/receiving is quick, it is necessary to perform 'reserve' processing of the next received message prior to sending processing.

That is, in the case of the above sequence, it is as follows.

```
reserve S1F13      // Reservation to receive S1F13  
wait              // Waiting for receiving S1F13  
receive S1F13     // Not necessarily necessary  
release S1F13     // Release received information of S1F13  
  
reserve S1F1      // Before S1F14 send, perform the next S1F1 reserve  
send S1F14_XX     // Reply S1F14  
wait             // Waiting for receiving S1F1  
receive S1F1      // Not necessarily necessary  
release S1F1      // Release received information of S1F1  
send S1F2_XX      // Reply S1F12
```

(15) cancel ..... Cancellation of waiting for reception SF-Code

```
cancel SxFx [SxFx] ...    or    cancel all
~~~~~
```

SxFx : Awaiting receiving SF-code to cancel ((Note) Not a message name)  
all : Cancel all pending SF-code.

(Description) Cancel waiting for receivingg messages to be processed by script.  
Delete the specified SF-Code from the reserved list. When 'release' statement is executed on received message, the SF-Code of that message is automatically deleted from reservation list. Therefore, there is no need to execute 'cancel' statement for that SF-Code. When waiting for receiving with same SF-Code again, 'reserve' statement must be executed again.

(16) wait ..... Waiting to receive the SF-Code message specified in "reserve"

```
wait [msec]
~~~~~
```

msec : Timeout value for releasing the wait state (mili seconds)  
In case of omission or msec=0, timeout does not occur.  
Script variables and special variables (!T3) can be used.

(Description) Wait until the message of the SF-code reserved by 'reserve' statement is received. In the wait statement, the received message must "always" 'release' statement to declare the completion of the receiving process.  
The information of the SECS message received by the wait statement is stored in the special variable at this time.  
When a timeout occurs, !ER==3.

(17) release (rels) ..... Release received SECS message area

```
release SxFx      or      rels SxFx
~~~~~
```

SxFx : SF code to be processed

((Note) It is not a message name. specified in reserve statement)

(Description) Ends analysis of message which is received by 'wait' statement with 'receive' statement, and releases the received data area.  
The 'receive' statement does not have to be executed.

(Note 1) **If you want to continue to receive the received SF-Code, specify that SF-Code again in 'reserve' statement without using 'release' statement. If it is not to be received at this point, 'release' processing must always be performed on the received SF-Code.**

In particular, in the case where Multi Open Transaction occurs, when receiving and processing same SF-Code consecutively, describe 'reserve' statement without describing 'release' statement.

Refer to the following (Example 1), (9) reserve statement, and (10) wait statement.

(Note 2) After processing returns to the script by receiving SECS message from wait statement, it must be within 10seconds to complete receiving processing of SECS message by 'release' statement. (It is possible to change 10seconds with 'set !TW =20000' etc.

Refer to 'set' statement)

Be especially careful during STEP execution.

(Note 3) After 'release' statement is executed, the contents of special variables (such as !ER) are not guaranteed.

That is, after the wait statement, for example, processing such as branching processing by the value of !CD can be performed, but once 'release' statement is executed, processing such as determination can not be performed thereafter.

When using it in, for example, 'send' statement after 'release' statement, assign the value of special variable to a script variable once before executing 'release' statement.

(Example 1) For example, in the case of sequence in which S6F11 is continuously received and S6F12 is returned, it is as follows.

```
reserve S6F11 // Reservation to receive S6F11
while true do // Infinite loop
 wait // Waiting for receiving S6F11
 receive S6F11 // Not necessarily necessary
//release S6F11 // If you continue to reserve S6F11, do not use the release
 // statement
 reserve S6F11 // Before S6F12 send, perform next S6F11 reserve
 send S6F12_XX // Reply S6F12
endwhile
```

(18) receive (recv) ..... Parsing received SECS messages

```
receive SxFx [scv=item [scv=item ...]] or recv SxFx [scv=item [scv=item ...]]
~~~~~
```

SxFx : SF code to be processed  
((Note) It is not a message name. specified in reserve statement)

scv=item : Get data value from received message, and instruct assignment to script variable.

scv (script variable) has the following, and any item and any variable can specify message items of all types.

\$00 .. \$99 : String variable  
%00 .. %99 : Integer variable  
&00 .. &99 : Real variable

'item' is item name set in message definition file, and in the case of an indefinite number of items, specify item number such as "item:9" (9 is 1 or more item number, and ':' is a colon)

Also, in the case of a numeric item, if there are multiple item values, and if it is not the first item, specify in format "item:9" (9 is a 0 or more in-item subscript value, and ';' is a semicolon).

For example, it describes as follows. If the description becomes long, put '¥' at the end of line to continue to next line.

In addition, it is possible to divide and describe in multiple lines.

```
receive S2F49 $1=RCMD $2=LOTID %1=STKD %2=IDATA:1;7 ¥
                &2=RDATA:3
```

-- or --

```
receive S2F49 $1=RCMD $2=LOTID
receive S2F49 %1=STKD %2=IDATA:1;7 &2=RDATA:3
```

(Note 1) If the last received message is the specified SF-Code, perform processing on the message of that SF code.

Nothing is processed for messages other than the specified SF-Code.

(Note 2) You must execute 'wait' statement before 'receive' statement.

'receive' statement does not have to be executed.

**'release' statement (possibly substituted by 'reserve' statement) is always required.**

Refer to (14) reserve statement, and (16) wait statement.

(Note 3) The 'receive' statement corresponding to one message receiving in 'wait' statement can be executed multiple times.

If there are many message items to be processed, it may be divided into multiple steps.

(Note 4) Be sure to execute 'release' statement (or possibly 'reserve' statement) after analysis of received message by 'receive' statement is completed.

(19) send ..... Send specified SECS Message

```
send SxFx_xx [item=value [item=value ... [@file="data_file.dat[, sect]] ...]]  
~~~~~
```

SxFx\_xx : Message name set in the message definition file ((Note) It is not SF-Code)

item=value : Set values for the items that make up specified message.  
The message data to be used is the currently set content with the value specified in this option overwritten. The contents set here are not reflected in the original message data.

Unfixed number list item : item=99  
String item : item="xxxxxxxx"  
Numeric item : item=99 or =0xff or =99.999 or =9.999e999

Script variables and special variables can be specified as 'value'.  
Refer to 'set' statement for script variables and special variables.  
Any type variable can be specified for any item.  
When setting a string constant in a string item, script variables and special variables can be embedded in the string constant. For example, you can specify "ABC %1 XYZ !!TM = !TM" for a string item. (Refer to 'set' statement)

For example, it describes as follows. If the description becomes long, put '¥' at the end of line to continue to next line.

```
send s2f49_hload RCMD="LOADDATA" LOTID="This is LOTID" ¥
PORT=2 MTKD=%5 ¥
PDATA="%12,%13,%14,%15" RECIPE=$1 CASSETE=$3
```

(Note 1) If there is an undefined number list in the specified message, specify the number of all undefined number lists in order from the upper list item, and then specify the normal item.  
When the number of lists is fixed, the item names in the list change according to the rules.  
Please refer to TDSE.pdf described in Chapter 1 for the rule of item name at the time of fixed quantity list fixed.  
(See the notes and examples in \_TDSMDMmsgBuild().)

(Note 2) When specifying multiple numeric item values, enclose entire value with "" and specify as item="1,2,%12,%13,99".

(Note 3) It is also possible to specify only a part of the item value.  
Therefore, it is possible to specify "item;3=12,13,%5,%6" using the format as in 'receive' statement.  
When setting non-consecutive data, the same item can be specified multiple times, but it must be specified continuously.  
For example, the item ITEM having 10 data values will be described. When you set ITEM[3]=3, [5]=5, and [6]=6, you specify as ITEM;3=3 ITEM;5="5,6".

<< Continue to next page >>

<< Continue from previous page >>

@file="data\_file.dat,section" : Specify the values of items that make up specified message in file (item value setting file).

data\_file.dat : File path name with item value specified  
section : Section name to be used in the specified file

The item value specification file has the following .ini file configuration.

// Comment .....

// First, specify the field value to be used when 'section' is not specified.

RCMD = "LOADDATA" // Data type

PORT = 3 // Port number

// Next, specify the item value when 'section' is specified.

[SECT01]

RCMD = "LOAD#1" // First data type

PORT = 2 // First port number

// In the following, write in the same way.

// For example, when using the setting of SECT01, if this file is "sample.dat",  
// write as below.

// send s2f49\_hload @file="sample.dat,SECT01"

(Note 4) The deviceID added to the sending primary message uses the value set in !DX.

If the !DX value is 0, the first deviceID specified in DEVID of configuration file (.ini) is used.

The deviceID assigned to the sending secondary message uses the deviceID (!DV) assigned to the primary message received immediately before.

(Note 5) !ER=2 is set when a transmission error occurs.

- (20) sleep ..... Sleep for specified time

```
sleep msec
~~~~~
```

msec : Wait time (mili seconds)  
It is possible to use script variables.

- (21) display (disp) ..... Output script variable to communication trace

```
display [scp] or disp [scp]
~~~~~
```

scp : Script variable  
If omitted, all script variables and special variables are displayed.

- (22) print ..... Output specified string to communication trace

```
print string
~~~~~
```

string : Print output string  
You can include \$99,%99,&99,!ER, etc. in the string.

- (23) pause ..... Move to STEP mode (execute one line at a time)

```
pause
~~~~~
```

Switch to Conversation (STEP) mode.